

立興(楊氏)有限公司


LIP HING (YEUNG'S) COMPANY LIMITED

不銹鋼窗較 安裝及選購要點

TIPS FOR CHOOSING AND INSTALLING STAINLESS STEEL FRICTION HINGE


窗較所需空間要求

SPACE REQUIREMENT FOR INSTALLING FRICTION HINGE

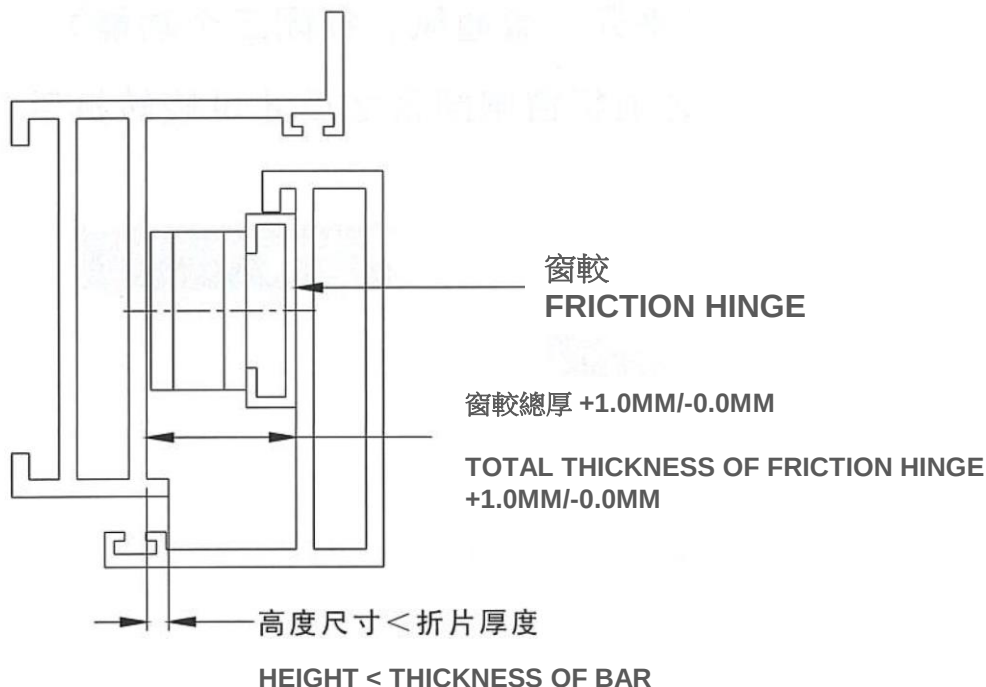

螺絲選購

CHOICE OF SCREWS

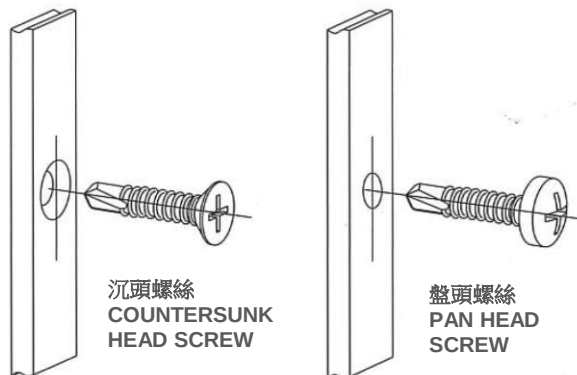

- ❖ 用M5自攻自鑽螺絲 或 M5機絲
- ❖ 有沉頭的地方必須用沉頭螺絲, 其他地方如底槽或沒有沉頭孔的地方則用盤頭螺絲; 結構承重配件要選用M5自攻自鑽螺絲, 這才能確保安裝的牢固性及可靠性
- ❖ 所有螺絲均需打入鋼襯內
- ❖ Use M5 self-drilling tapping screws or M5 screws
- ❖ Use countersunk head screw when there is a countersunk hole. For other screw holes, use pan head screw. Use self-drilling tapping screw when it is a load bearing point.
- ❖ All screws must be mounted through steel lining