

立興 (楊氏) 有限公司

LIP HING (YEUNG'S) COMPANY LIMITED

HYLS系列平開窗不鏽鋼窗較

“HYLS” SERIES STAINLESS STEEL FRICTION HINGE FOR SIDE HUNG WINDOW

特徵

- 物料: 304不鏽鋼
- ❖ 50,000次嚴格開關測驗後仍能操作正常, 確保恒久耐用
 - ❖ 質量符合英國BS6375-2:2009
 - ❖ 必須跟不鏽鋼墊片一起使用為達致理想效果

Features

- Material: Grade 304 stainless steel
- ❖ Durability proven by opening and closing test 50,000 times
 - ❖ Satisfied the requirements of British Standard BS6375-2:2009.
 - ❖ To maximize the functionality of the hinges, must install with stainless steel plate




建議鋁窗規格 SUGGESTED WINDOW SPECIFICATION				
(窗扇高及寬只作參考用, 以窗重量為準) (Window sash size is for reference only while window loading is the main determinant)				
型號 Model No.	窗扇高 Sash Height (mm)	窗扇最寬 Max. Sash Width (mm)	窗最重 Max. Loading (KG)	窗開角度 Opening (+0°/-5°)
HYLS12	1700	522	60	90°
HYLS14	1700	582	68	90°
HYLS16	1700	682	83	90°
HYLS18	1700	695	82	90°

立興 (楊氏) 有限公司

LIP HING (YEUNG'S) COMPANY LIMITED

HYLS系列平開窗不鏽鋼窗較

“HYLS” SERIES STAINLESS STEEL FRICTION HINGE FOR SIDE HUNG WINDOW

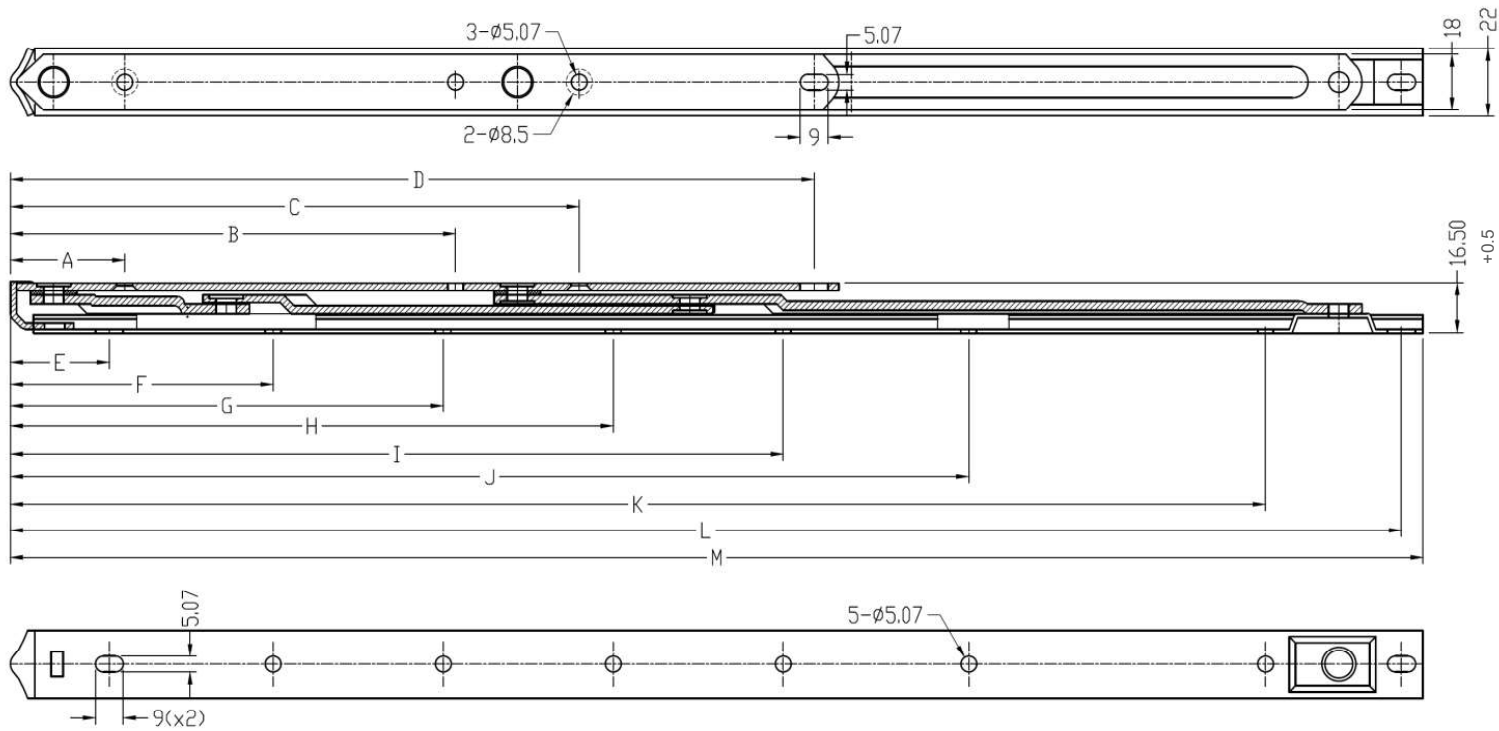

** 所有螺絲孔需要全部安裝合適螺絲

** All screw holes must be mounted with proper screws

尺寸 MEASUREMENTS (mm)													
型號 Model No.	A	B	C	D	E	F	G	H	I	J	K	L	M
HYLS12	37	84	124	200	32	100	170	-	-	242	263	307	316
HYLS14	37	100	140	216	32	90	150	210	-	265	300	344	351
HYLS16	37	124	164	240	32	90	150	210	270	325	361	405	412
HYLS18	37	144	184	260	32	85	140	195	250	310	406	450	457

有測驗報告可提供

Test report available upon request

立興 (楊氏) 有限公司

LIP HING (YEUNG'S) COMPANY LIMITED

HYLS系列平開窗不鏽鋼窗較


“HYLS” SERIES STAINLESS STEEL FRICTION HINGE FOR SIDE HUNG WINDOW

不銹鋼窗較安裝要點

TIPS FOR INSTALLING STAINLESS STEEL FRICTION HINGE

窗較所需空間要求

SPACE REQUIREMENT FOR INSTALLING FRICTION HINGE

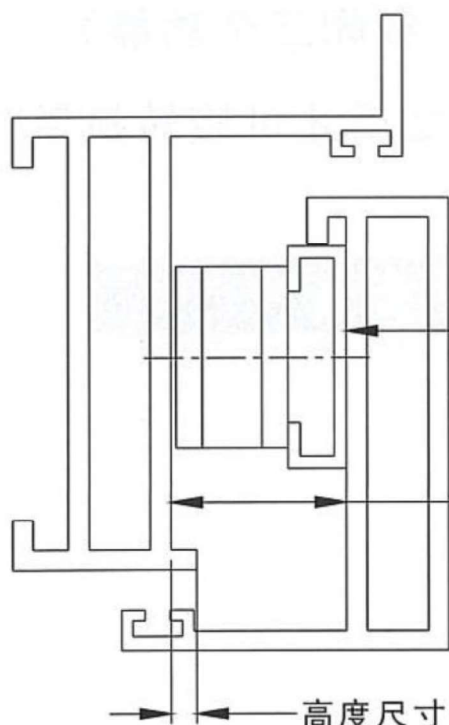

窗較
FRICTION HINGE

17MM (最小min.) to 18MM (最大max.)

此間隙尺寸受各品牌鋁型材規格影響，請以樣品實際安裝測試為準。

The space in-between depends on the specifications of different aluminum profiles. Sample assembly and testing are advised to ensure optimal compatibility.

高度尺寸 < 折片厚度

HEIGHT < THICKNESS OF BAR

立興 (楊氏) 有限公司

LIP HING (YEUNG'S) COMPANY LIMITED

HYLS系列平開窗不鏽鋼窗較

“HYLS” SERIES STAINLESS STEEL FRICTION HINGE FOR SIDE HUNG WINDOW


不銹鋼窗較安裝指引

INSTALLATION GUIDE

圖中A螺絲為本司提供特製螺絲
All “A” marked screws are specially made by our Company for HYLS hinges.


所有螺絲為M5機絲
All should be M5 screws

圖中C螺絲必須是直徑8mm頭的平頭螺絲
All “C” marked screws are diameter 8mm flat head screw.

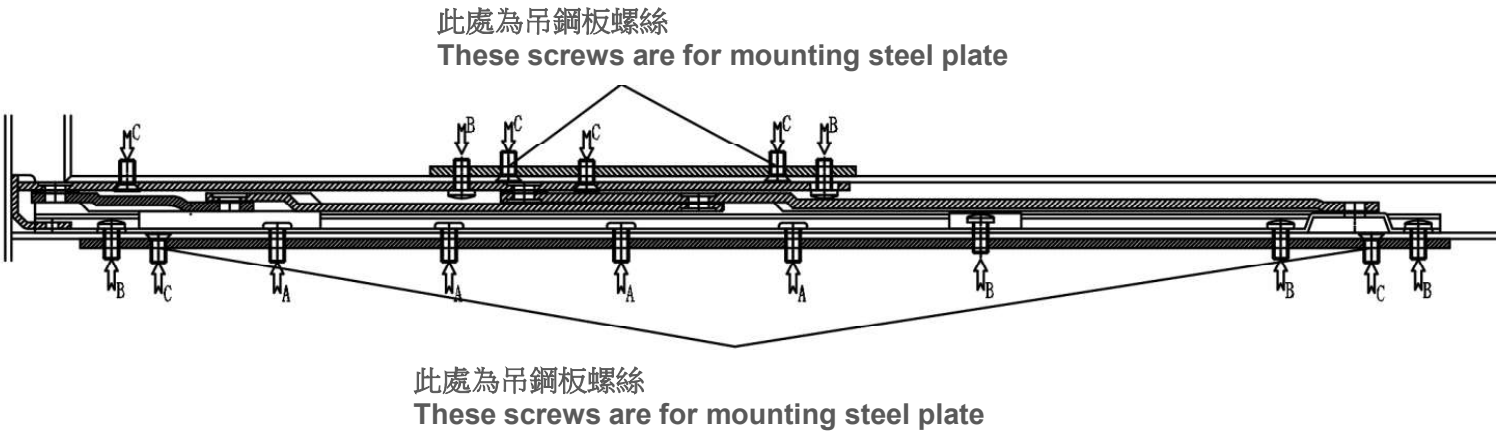

螺絲尺寸

Screw sizes

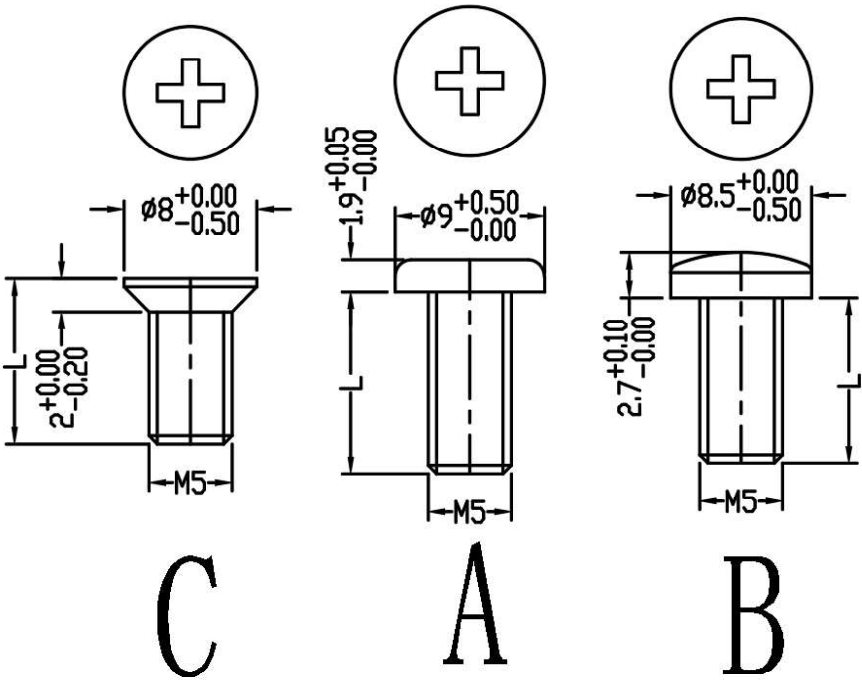

尺寸單位 Measurement unit: MM

立興 (楊氏) 有限公司


LIP HING (YEUNG'S) COMPANY LIMITED

HYLS系列平開窗不鏽鋼窗較


"HYLS" SERIES STAINLESS STEEL FRICTION HINGE FOR SIDE HUNG WINDOW

不銹鋼窗較安裝指引

INSTALLATION GUIDE

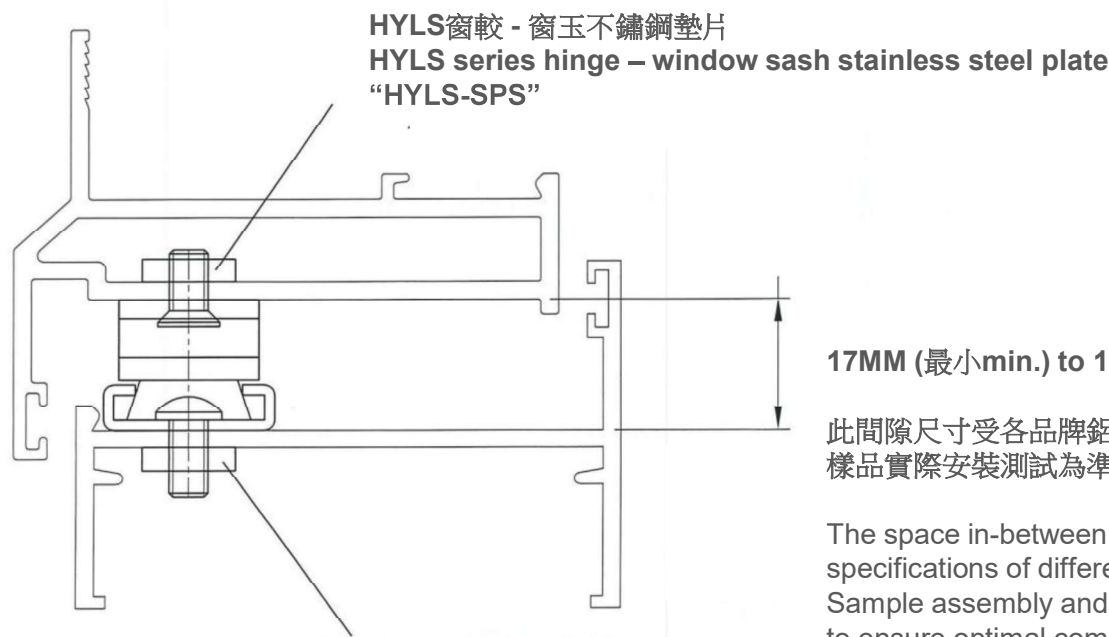

HYLS窗較 - 窗框不鏽鋼墊片
HYLS series hinge - window frame stainless steel plate
"HYLS-SPF"

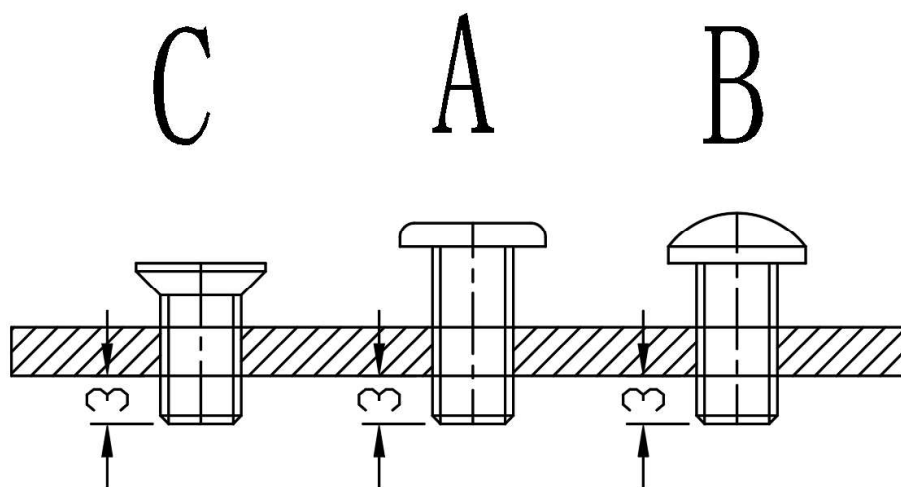

尺寸單位 Measurement unit: MM

所有螺絲收緊後凸出最少有約2mm – 3mm如上圖

After all screws are installed, screws must protrude at least 2mm – 3mm as shown above.

立興 (楊氏) 有限公司




LIP HING (YEUNG'S) COMPANY LIMITED

HYLS系列平開窗不鏽鋼窗較

“HYLS” SERIES STAINLESS STEEL FRICTION HINGE FOR SIDE HUNG WINDOW

不銹鋼窗較安裝指引

INSTALLATION GUIDE

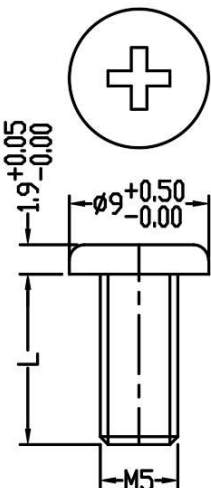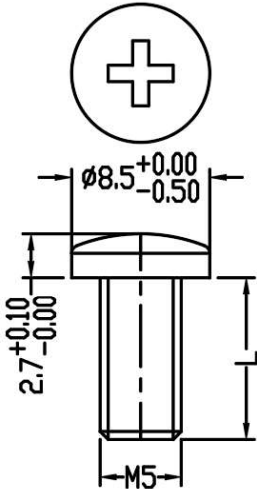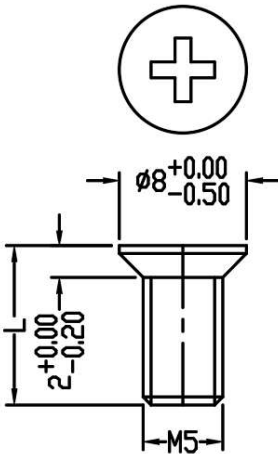	每1支數量 (粒) Quantity per hinge (piece)		
型號 Model No.	螺絲 “A” Screw “A”	螺絲 “B” Screw “B”	螺絲 “C” Screw “C”
尺寸 (mm) Measurement (mm)			
HYLS12	2	5	7
HYLS14	3	6	6
HYLS16	4	6	6
HYLS18	4	6	6