

立興 (楊氏) 有限公司

LIP HING (YEUNG'S) COMPANY LIMITED

HYLS系列平開窗不鏽鋼窗較


“HYLS” SERIES STAINLESS STEEL FRICTION HINGE FOR SIDE HUNG WINDOW

不銹鋼窗較安裝要點

TIPS FOR INSTALLING STAINLESS STEEL FRICTION HINGE

窗較所需空間要求

SPACE REQUIREMENT FOR INSTALLING FRICTION HINGE

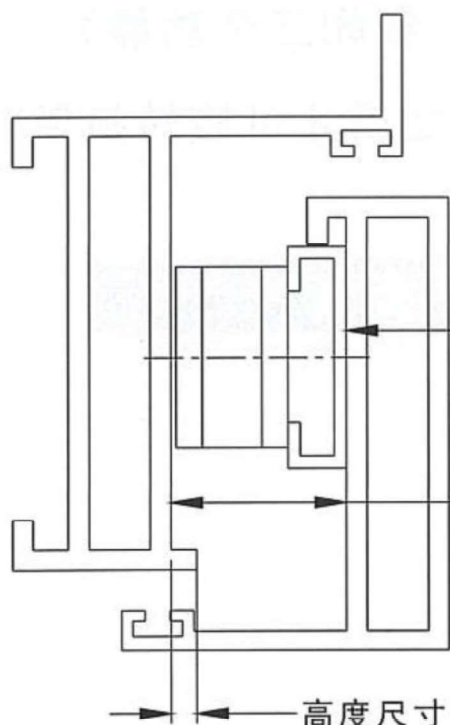

窗較
FRICTION HINGE

17MM (最小min.) to 18MM (最大max.)

此間隙尺寸受各品牌鋁型材規格影響，請以樣品實際安裝測試為準。

The space in-between depends on the specifications of different aluminum profiles. Sample assembly and testing are advised to ensure optimal compatibility.

高度尺寸 < 折片厚度

HEIGHT < THICKNESS OF BAR

立興(楊氏)有限公司

LIP HING (YEUNG'S) COMPANY LIMITED

HYLS系列平開窗不鏽鋼窗較

"HYLS" SERIES STAINLESS STEEL FRICTION HINGE FOR SIDE HUNG WINDOW

不銹鋼窗較安裝指引

INSTALLATION GUIDE

圖中A螺絲為本司提供特製螺絲

All "A" marked screws are specially made by our Company for HYLS hinges.

所有螺絲為M5機絲


All should be M5 screws

圖中C螺絲必須是直徑8mm頭的平頭螺絲

All "C" marked screws are diameter 8mm flat head screw.

此處為吊鋼板螺絲

These screws are for mounting steel plate

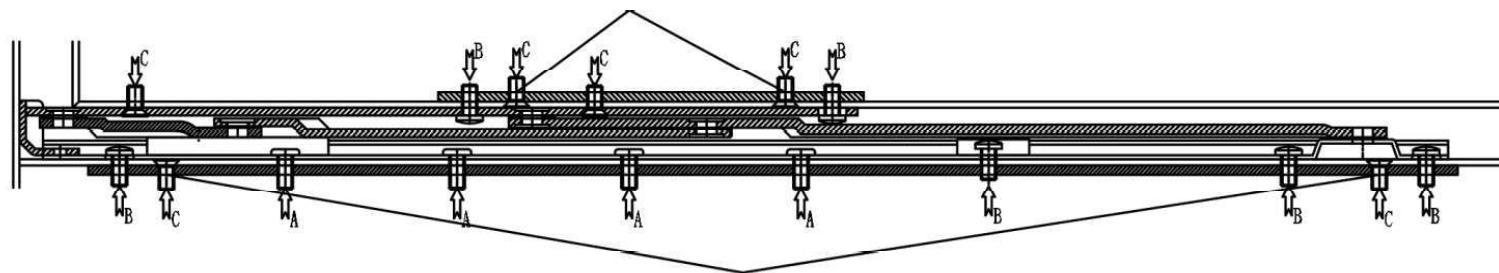


此處為吊鋼板螺絲

These screws are for mounting steel plate

螺絲尺寸

Screw sizes

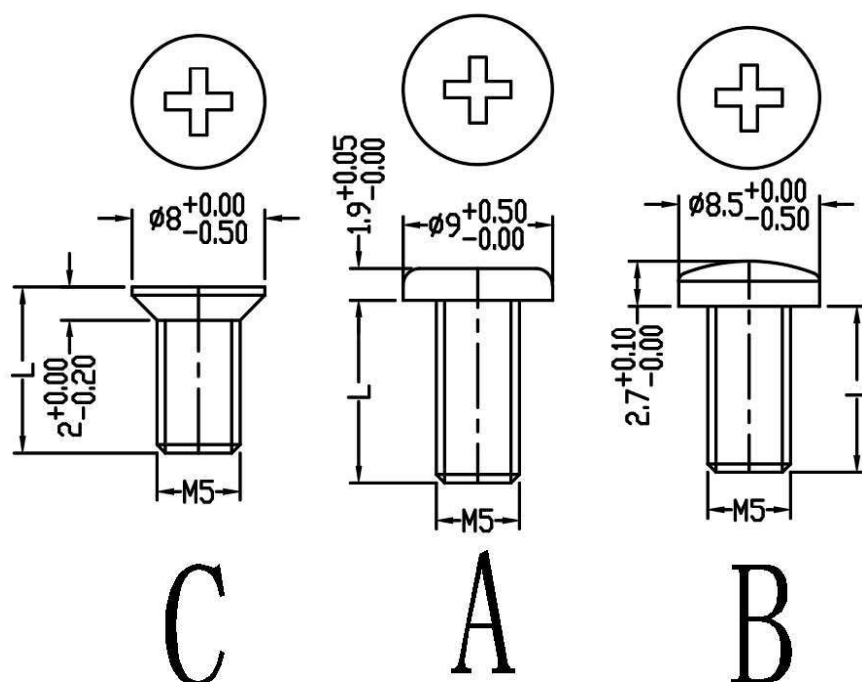

尺寸單位 Measurement unit: MM

立興 (楊氏) 有限公司



LIP HING (YEUNG'S) COMPANY LIMITED

HYLS系列平開窗不鏽鋼窗較

"HYLS" SERIES STAINLESS STEEL FRICTION HINGE FOR SIDE HUNG WINDOW

不銹鋼窗較安裝指引

INSTALLATION GUIDE

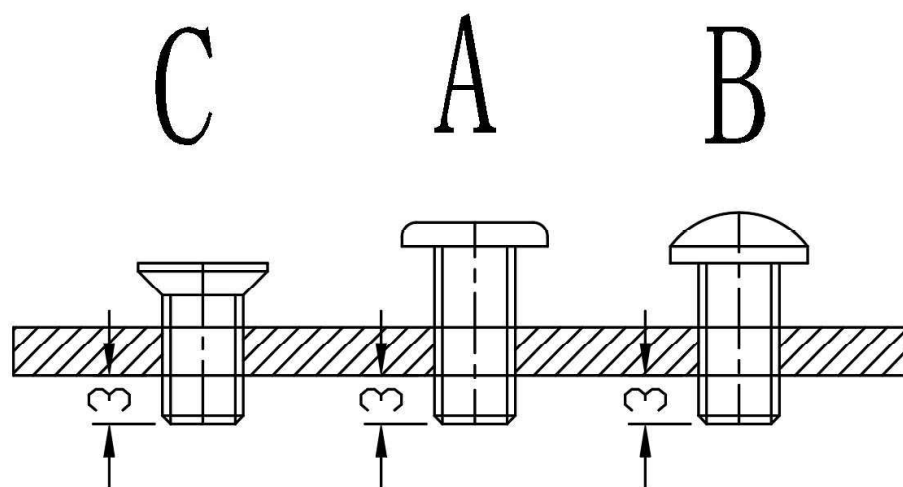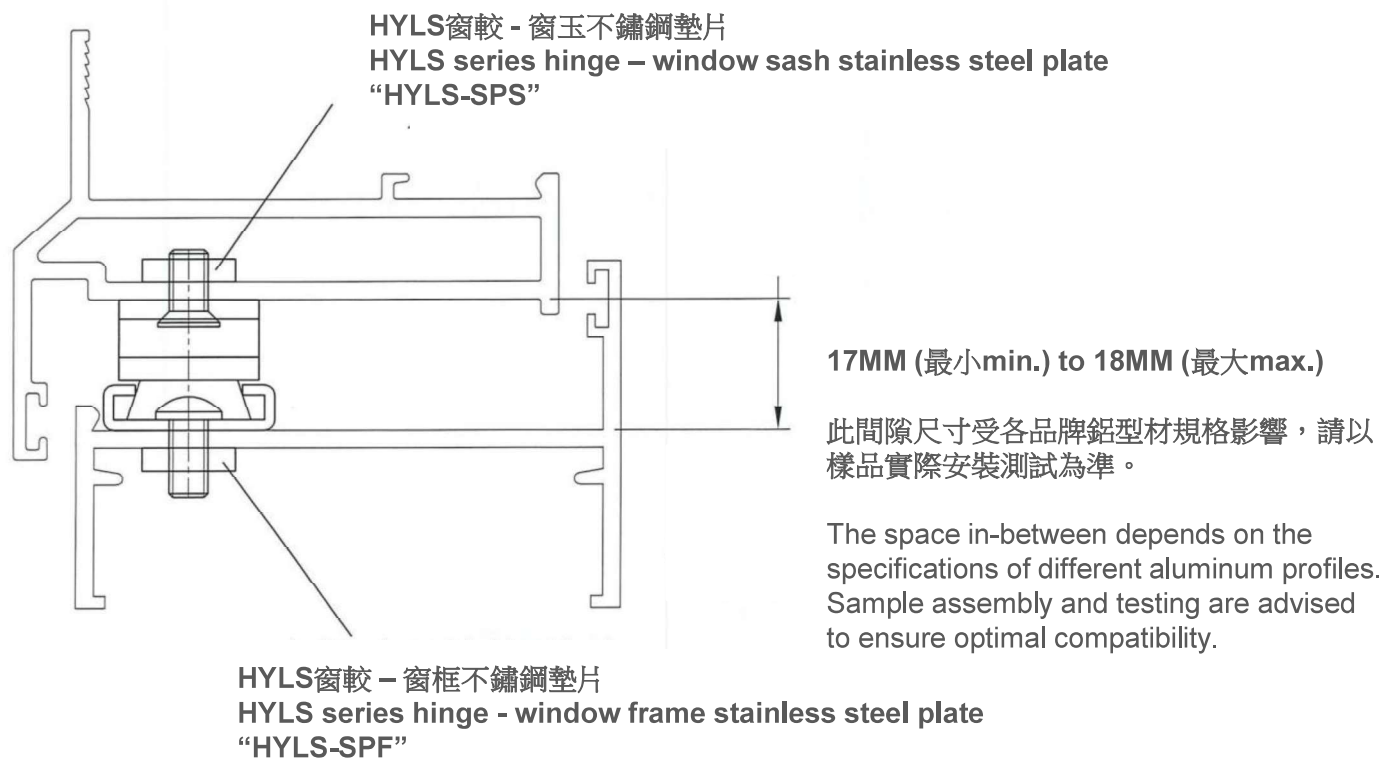

尺寸單位 Measurement unit: MM

所有螺絲收緊後凸出最少有約2mm – 3mm如上圖

After all screws are installed, screws must protrude at least 2mm – 3mm as shown above.

立興 (楊氏) 有限公司




LIP HING (YEUNG'S) COMPANY LIMITED

HYLS系列平開窗不鏽鋼窗較

“HYLS” SERIES STAINLESS STEEL FRICTION HINGE FOR SIDE HUNG WINDOW

不銹鋼窗較安裝指引

INSTALLATION GUIDE

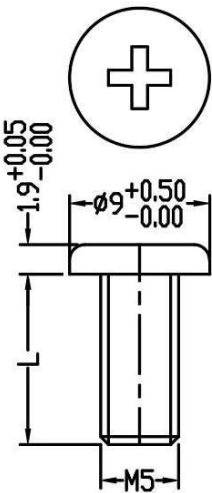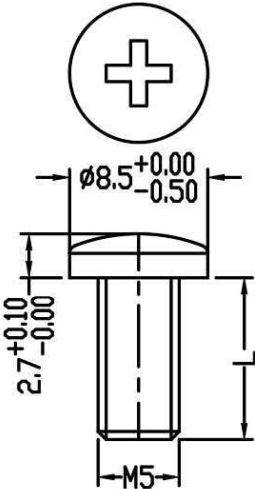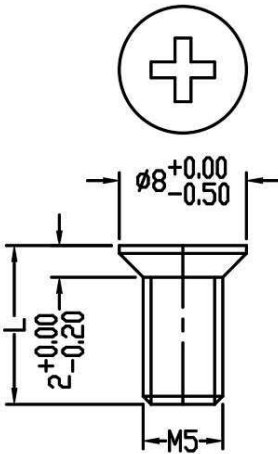	每1支數量 (粒) Quantity per hinge (piece)		
型號 Model No.	螺絲 “A” Screw “A”	螺絲 “B” Screw “B”	螺絲 “C” Screw “C”
尺寸 (mm) Measurement (mm)			
HYLS12	2	5	7
HYLS14	3	6	6
HYLS16	4	6	6
HYLS18	4	6	6