

立興 (楊氏) 有限公司

LIP HING (YEUNG'S) COMPANY LIMITED

HHMS-N系列平開窗不銹鋼窗較

“HHMS-N” SERIES STAINLESS STEEL FRICTION HINGE FOR SIDE HUNG WINDOW

特徵

物料: 304不鏽鋼

- ❖ 50,000次嚴格開關測驗後仍能操作正常, 確保恒久耐用
- ❖ 質量符合英國BS6375-2:2009

Features

Material: Grade 304 stainless steel

- ❖ Durability proven by opening and closing test 50,000 times
- ❖ Satisfied the requirements of British Standard BS6375-2:2009.



建議鋁窗規格

SUGGESTED WINDOW SPECIFICATION

(窗扇高及寬只作參考用, 以窗重量為準)

(Window sash dimensions are for reference only; window weight is the primary determinant.)


型號 Model No.	窗扇高 Sash Height (mm)	窗扇最寬 Max. Sash Width (mm)	窗最重 Max. Loading (KG)	窗開角度 Opening (+0°/-5°)
HHMS-N12	1700	525	41.4	90°
HHMS-N14	1700	585	47	90°
HHMS-N16	1700	685	53.8	40°/45°/90°
HHMS-N18	1700	700	54.4	35°/45°/90°

立興 (楊氏) 有限公司

LIP HING (YEUNG'S) COMPANY LIMITED

HHMS-N系列平開窗不銹鋼窗較

“HHMS-N” SERIES STAINLESS STEEL FRICTION HINGE FOR SIDE HUNG WINDOW

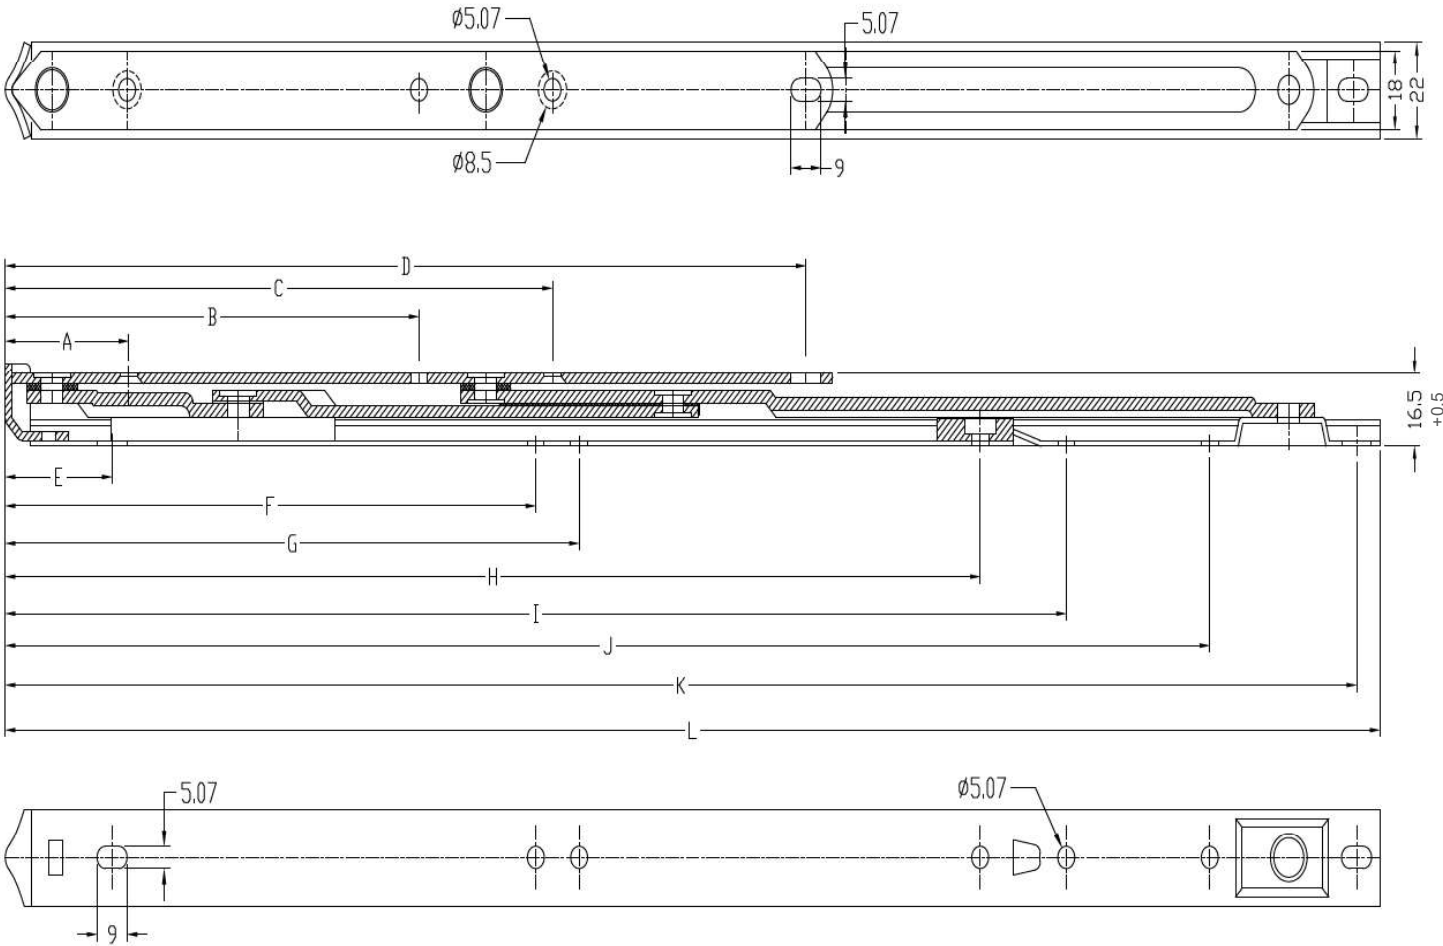

尺寸 MEASUREMENTS (mm)												
型號 Model No.	A	B	C	D	E	F	G	H	I	J	K	L
HHMS-N12	37	84	124	200	32	-	-	-	242	263	307	316
HHMS-N14	37	100	140	216	32	-	-	-	265	300	344	352
HHMS-N16	37	124	164	240	32	159	172	292.2	318	361	405	412
HHMS-N18	37	144	184	260	32	154.5	181.5	321.9	348	406	450	457

有測驗報告可提供

Test report available upon request

立興(楊氏)有限公司

LIP HING (YEUNG'S) COMPANY LIMITED

HHMS-N系列平開窗不銹鋼窗較


“HHMS-N” SERIES STAINLESS STEEL FRICTION HINGE FOR SIDE HUNG WINDOW

不銹鋼窗較安裝要點

TIPS FOR INSTALLING STAINLESS STEEL FRICTION HINGE

窗較所需空間要求

SPACE REQUIREMENT FOR INSTALLING FRICTION HINGE

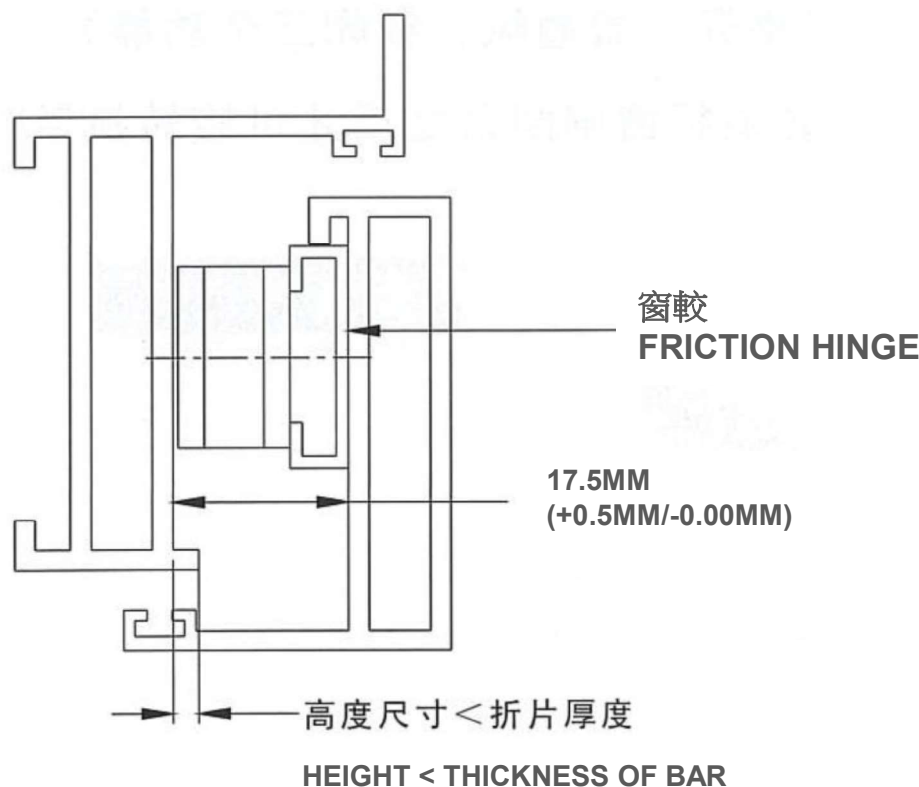


立興(楊氏)有限公司

LIP HING (YEUNG'S) COMPANY LIMITED

HHMS-N系列平開窗不銹鋼窗較

“HHMS-N” SERIES STAINLESS STEEL FRICTION HINGE FOR SIDE HUNG WINDOW

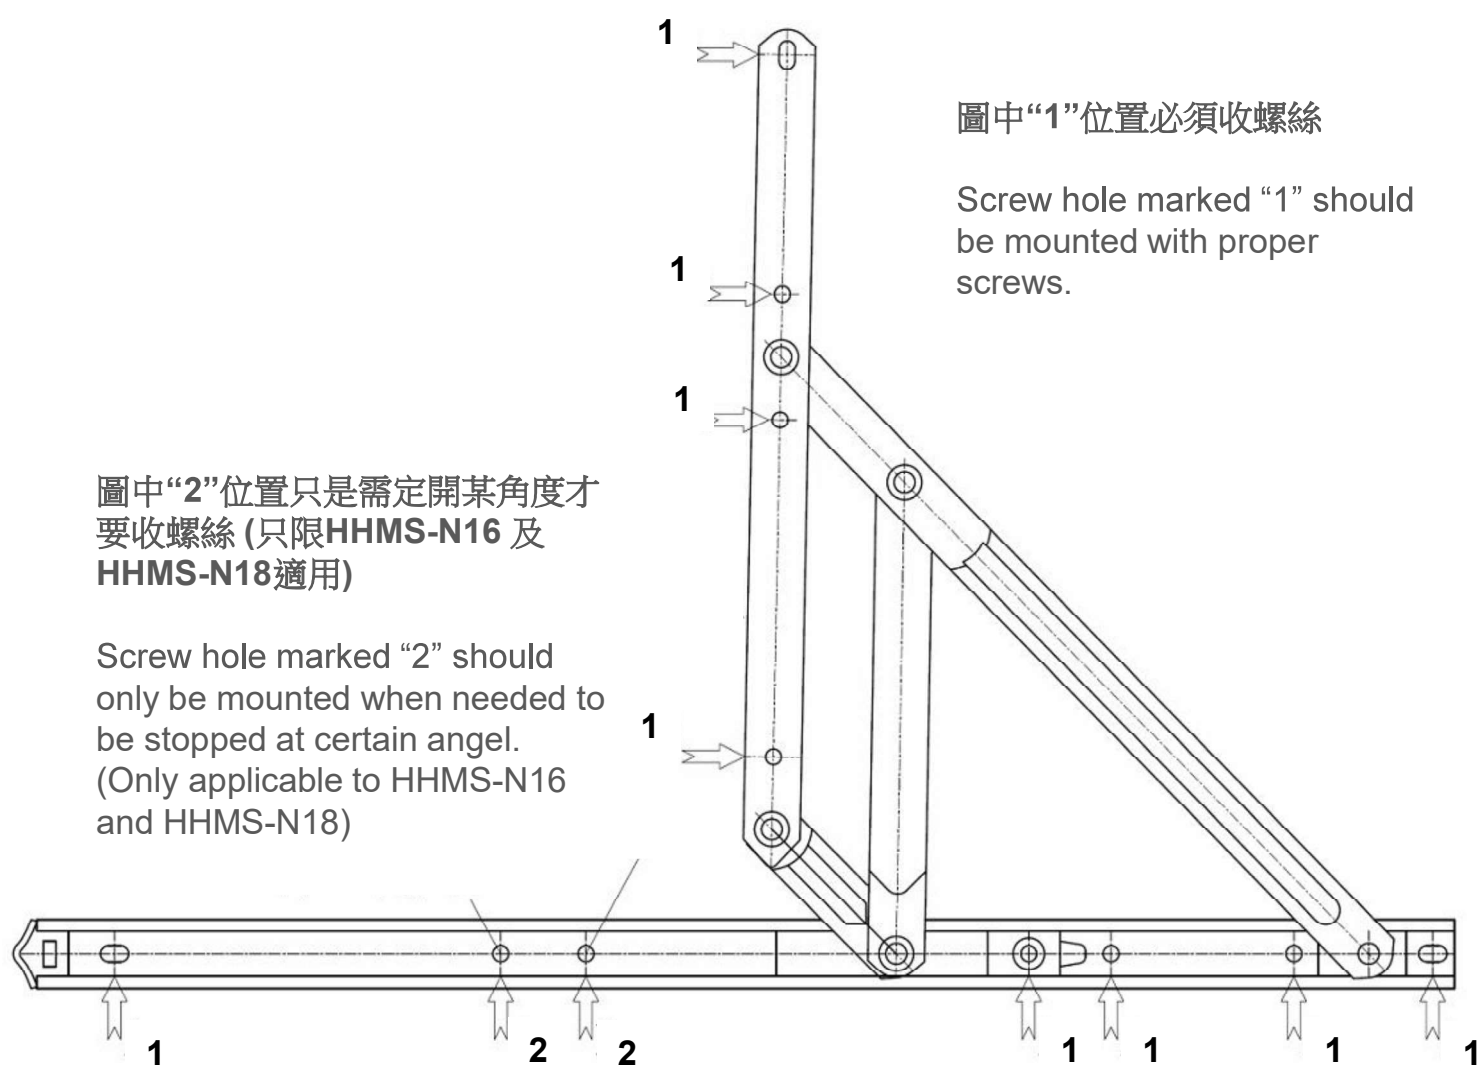不銹鋼窗較安裝指引
INSTALLING GUIDE


立興(楊氏)有限公司

LIP HING (YEUNG'S) COMPANY LIMITED

HHMS-N系列平開窗不銹鋼窗較

“HHMS-N” SERIES STAINLESS STEEL FRICTION HINGE FOR SIDE HUNG WINDOW

不銹鋼窗較安裝指引 INSTALLING GUIDE

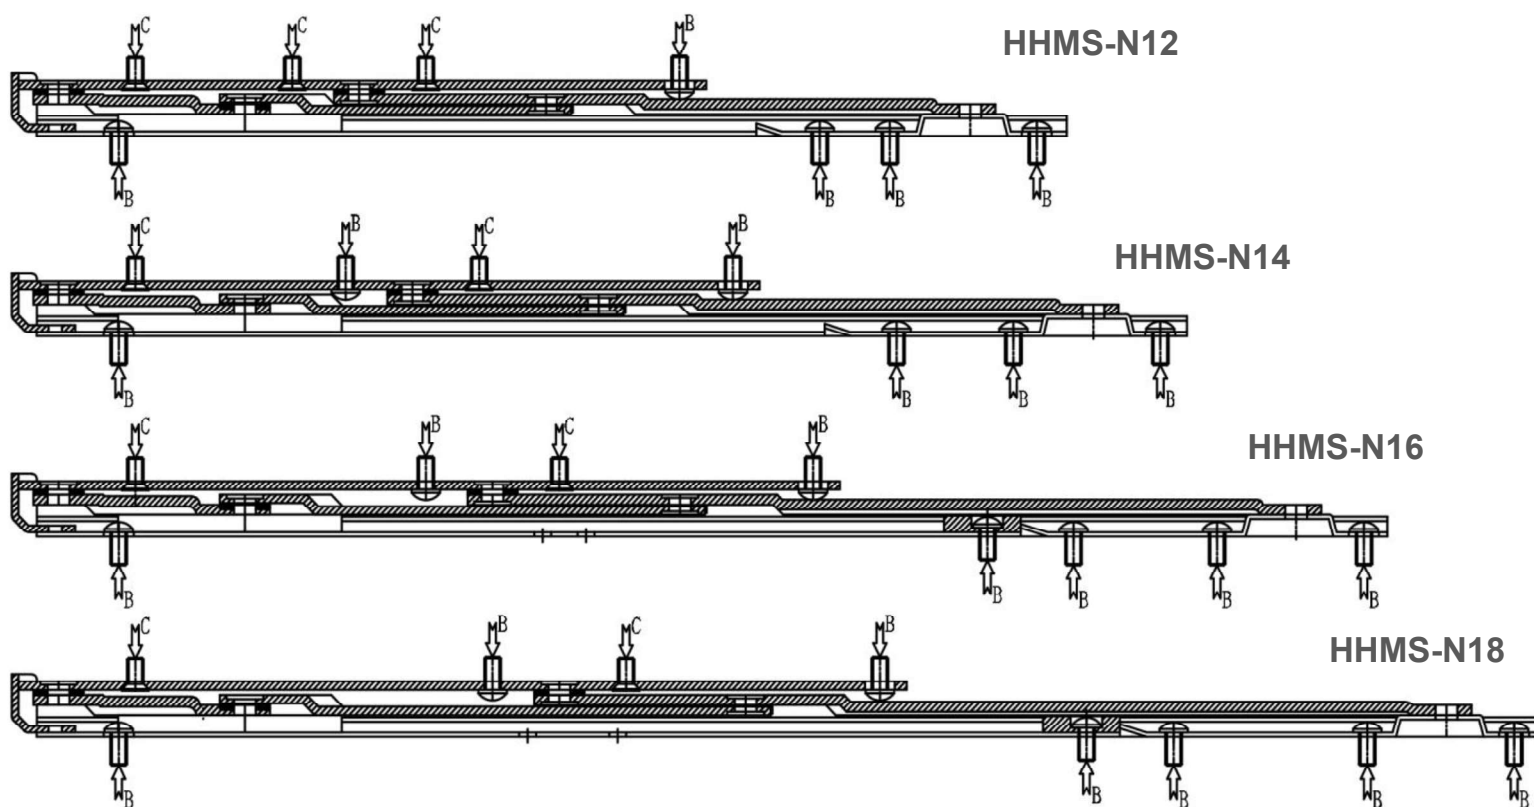


立興(楊氏)有限公司


LIP HING (YEUNG'S) COMPANY LIMITED

HHMS-N系列平開窗不銹鋼窗較

“HHMS-N” SERIES STAINLESS STEEL FRICTION HINGE FOR SIDE HUNG WINDOW

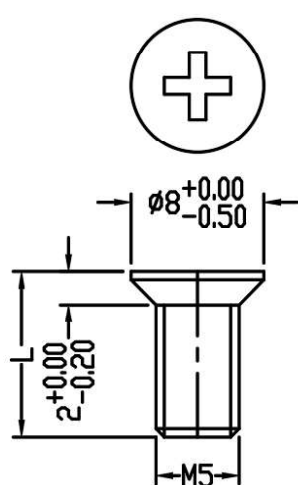
不銹鋼窗較安裝指引
INSTALLING GUIDE螺絲尺寸
Screw sizes

C

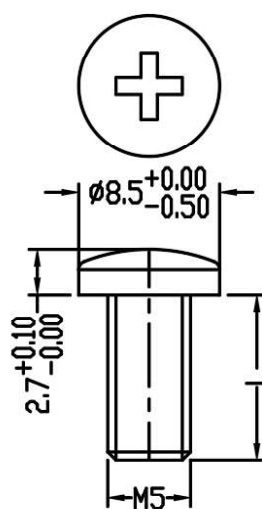

B

尺寸單位 Measurement unit: MM

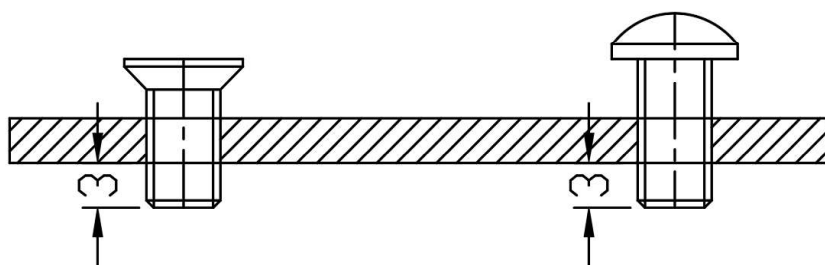所有螺絲收緊後凸出最少有約**2mm – 3mm**如上圖

After all screws are installed, screws must protrude at least 2mm – 3mm as shown above.

立興 (楊氏) 有限公司

LIP HING (YEUNG'S) COMPANY LIMITED

HHMS-N系列平開窗不銹鋼窗較

“HHMS-N” SERIES STAINLESS STEEL FRICTION HINGE FOR SIDE HUNG WINDOW

不銹鋼窗較安裝指引

INSTALLING GUIDE

型號 Model No.	螺絲 “B” Screw “B”	螺絲 “C” Screw “C”
尺寸 (mm) Measurement (mm)		
HHMS-N12	5	3
HHMS-N14	6	2
HHMS-N16	7	2
HHMS-N18	7	2