

立興(楊氏)有限公司

LIP HING (YEUNG'S) COMPANY LIMITED

HYLP 系列不鏽鋼窗較 (頂懸窗)


HYLP SERIES STAINLESS STEEL HINGE (FOR TOP HUNG WINDOW)

不銹鋼窗較安裝指引

INSTALLATION GUIDE

窗較所需空間要求

SPACE REQUIREMENT FOR INSTALLING FRICTION HINGE

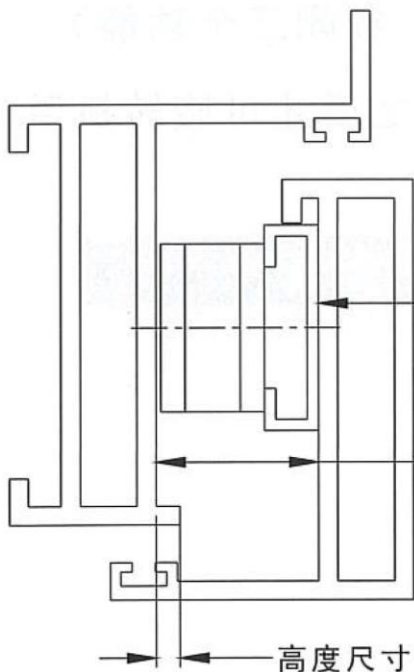

窗較
FRICTION HINGE

17MM (最小min.) to 18MM (最大max.)

此間隙尺寸受各品牌鋁型材規格影響，請以樣品實際安裝測試為準。

The space in-between depends on the specifications of different aluminum profiles. Sample assembly and testing are advised to ensure optimal compatibility.

高度尺寸 < 折片厚度

HEIGHT < THICKNESS OF BAR

立興(楊氏)有限公司

LIP HING (YEUNG'S) COMPANY LIMITED

HYLP 系列不鏽鋼窗較 (頂懸窗)

HYLP SERIES STAINLESS STEEL HINGE (FOR TOP HUNG WINDOW)

不銹鋼窗較安裝指引

INSTALLATION GUIDE

圖中A螺絲為本司提供特製螺絲

All “A” marked screws are specially made by our Company for HYLP hinges.

所有螺絲為M5機絲


All should be M5 screws

圖中C螺絲必須是直徑8mm頭的平頭螺絲

All “C” marked screws are diameter 8mm flat head screw.

此處為吊鋼板螺絲

These screws are for mounting steel plate

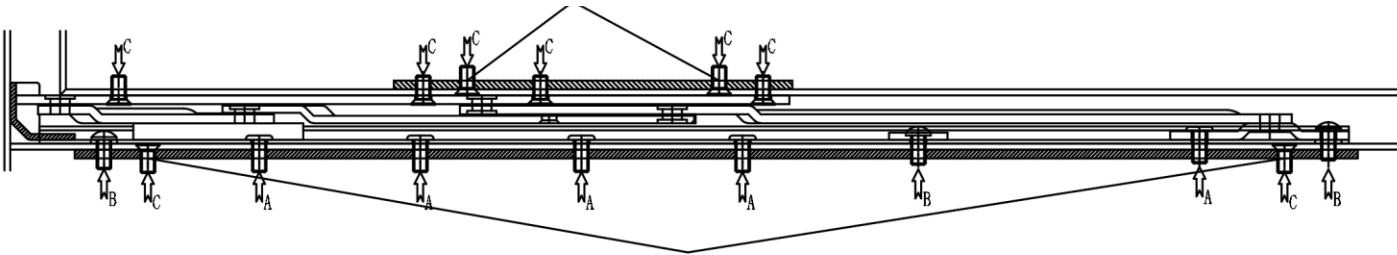


此處為吊鋼板螺絲

These screws are for mounting steel plate

螺絲尺寸

Screw sizes

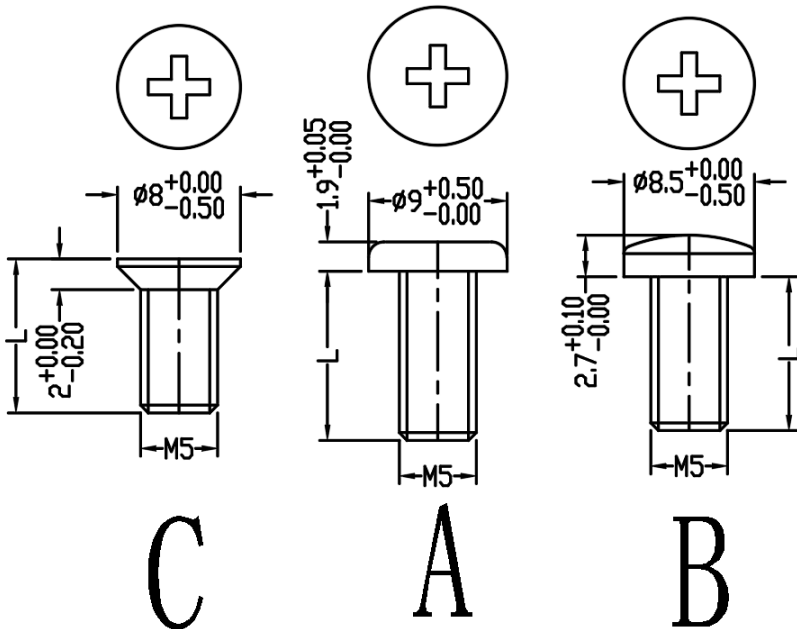

尺寸單位 Measurement unit: MM

立興(楊氏)有限公司


LIP HING (YEUNG'S) COMPANY LIMITED

HYLP 系列不鏽鋼窗較 (頂懸窗)


HYLP SERIES STAINLESS STEEL HINGE (FOR TOP HUNG WINDOW)

不銹鋼窗較安裝指引

INSTALLATION GUIDE

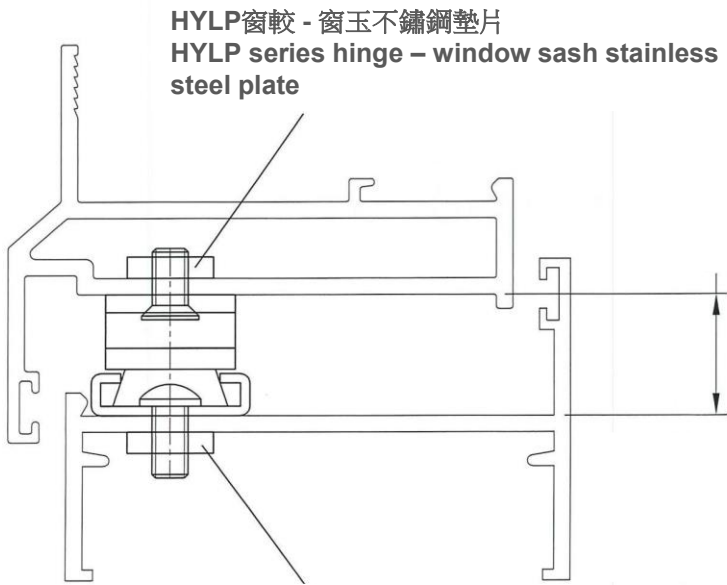

HYLP窗較 – 窗框不鏽鋼墊片
HYLP series hinge - window frame stainless steel plate



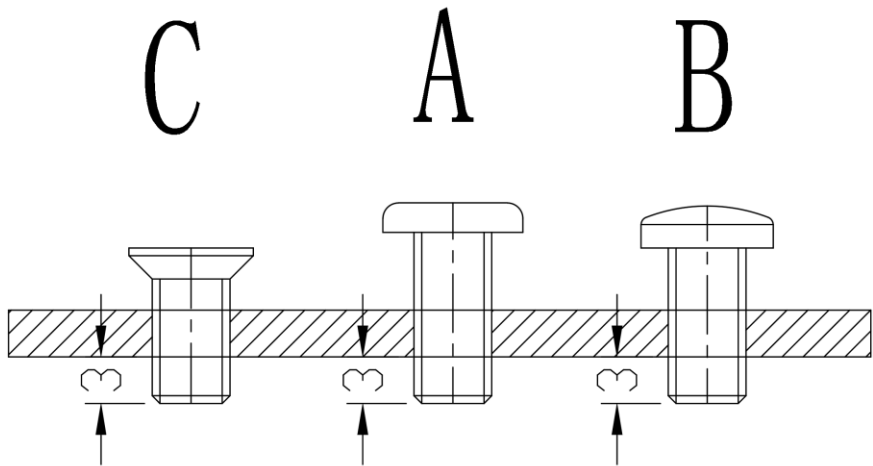


立興 (楊氏) 有限公司

LIP HING (YEUNG'S) COMPANY LIMITED

HYLP 系列不鏽鋼窗較 (頂懸窗)
HYLP SERIES STAINLESS STEEL HINGE (FOR TOP HUNG WINDOW)

不銹鋼窗較安裝指引
INSTALLATION GUIDE

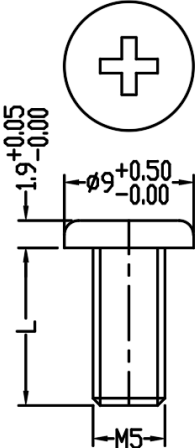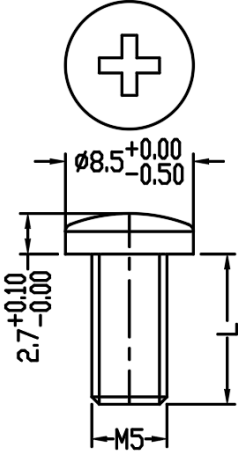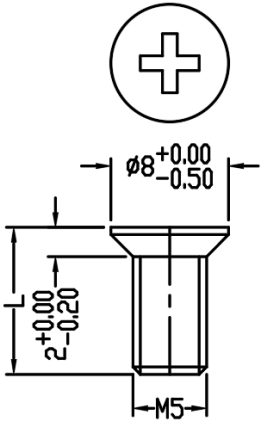	每1支數量 (粒) Quantity per hinge (piece)		
型號 Model No.	螺絲 “A” Screw “A”	螺絲 “B” Screw “B”	螺絲 “C” Screw “C”
尺寸 (mm) Measurement (mm)			
HYLP14-L HYLP14-R	4	3	8
HYLP16-L HYLP16-R	5	3	8
HYLP18-L HYLP18-R	5	3	8