

# 立興(楊氏)有限公司

## LIP HING (YEUNG'S) COMPANY LIMITED

### HHLT系列輕型頂懸窗方槽不鏽鋼窗較

"HHLT" SERIES LIGHT DUTY STAINLESS STEEL FRICTION HINGE FOR TOP HUNG WINDOW

#### 特徵

物料: 304不鏽鋼

- ❖ 50,000次嚴格開關測驗後仍能操作正常, 確保恒久耐用
- ❖ 質量符合英國BS6375-2:2009

#### Features

Material: Grade 304 stainless steel

- ❖ Durability proven by opening and closing test 50,000 times
- ❖ Satisfied the requirements of British Standard BS6375-2:2009



#### 建議鋁窗規格

#### SUGGESTED WINDOW SPECIFICATION

(窗扇高及寬只作參考用, 以窗重量為準)

(Window sash size is for reference only while window loading is the main determinant)

型號 Model No.	窗扇最高 Max. Sash Height (mm)	窗扇最寬 Max. Sash Width (mm)	窗最重 Max. Loading (KG)	窗開角度 Opening (-5°/+0°)
HHLT08	500	1000	15	45°
HHLT10	650	1110	27	45°
HHLT12	800	1200	35	40°

HHLT10 及 HHLT12 有測驗報告可提供

HHLT10 and HHLT12 have test report available upon request

立興(楊氏)有限公司

香港葵涌 葵昌路26-38號  
豪華工業大廈8字樓D座

立興楊氏實業(深圳)有限公司

中國廣東深圳市 光明新區  
玉塘街道 田寮社區 田益一街10號

電話 (852) 2412 2288 / 2423 8620 / 2412 2490 | 傳真 (852) 2489 2766


電郵 main@liphingyeungs.com.hk | 網址 sz-liphingyeungs.com

# 立興(楊氏)有限公司

## LIP HING (YEUNG'S) COMPANY LIMITED

### HHLT系列輕型頂懸窗方槽不鏽鋼窗較

"HHLT" SERIES LIGHT DUTY STAINLESS STEEL FRICTION HINGE FOR TOP HUNG WINDOW

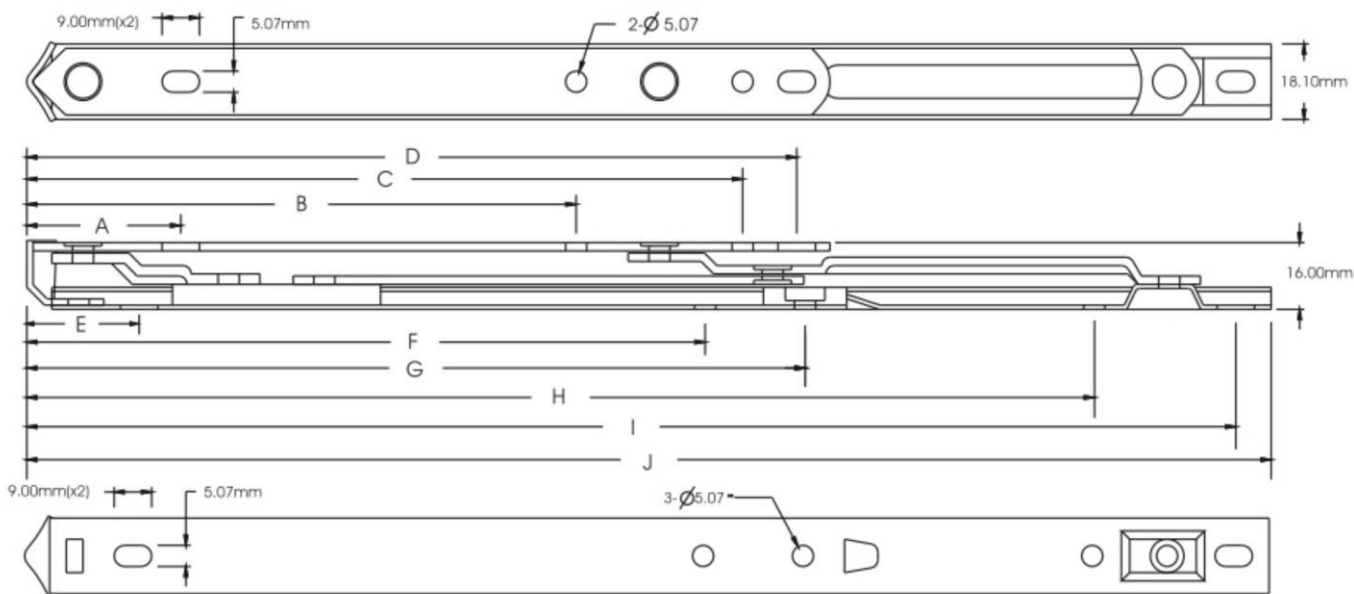

### 尺寸 MEASUREMENTS (mm)

型號 Model No.	A	B	C	D	E	F	G	H	I	J
HHLT08	37.00	73.50	113.50	126.50	26.00	-	162.00	-	197.50	206.00
HHLT10	37.00	99.50	139.50	152.50	26.00	129.50	174.00	211.50	245.50	254.50
HHLT12	37.00	80.00	133.00	173.00	26.00	163.50	187.00	256.50	290.50	299.00