

立興(楊氏)有限公司

LIP HING (YEUNG'S) COMPANY LIMITED

HHMT系列頂懸窗不銹鋼窗較 (左/右)


“HHMT” SERIES STAINLESS STEEL FRICTION HINGE FOR TOP HUNG WINDOW (LH/RH)

不銹鋼窗較安裝要點

TIPS FOR INSTALLING STAINLESS STEEL FRICTION HINGE

窗較所需空間要求

SPACE REQUIREMENT FOR INSTALLING FRICTION HINGE

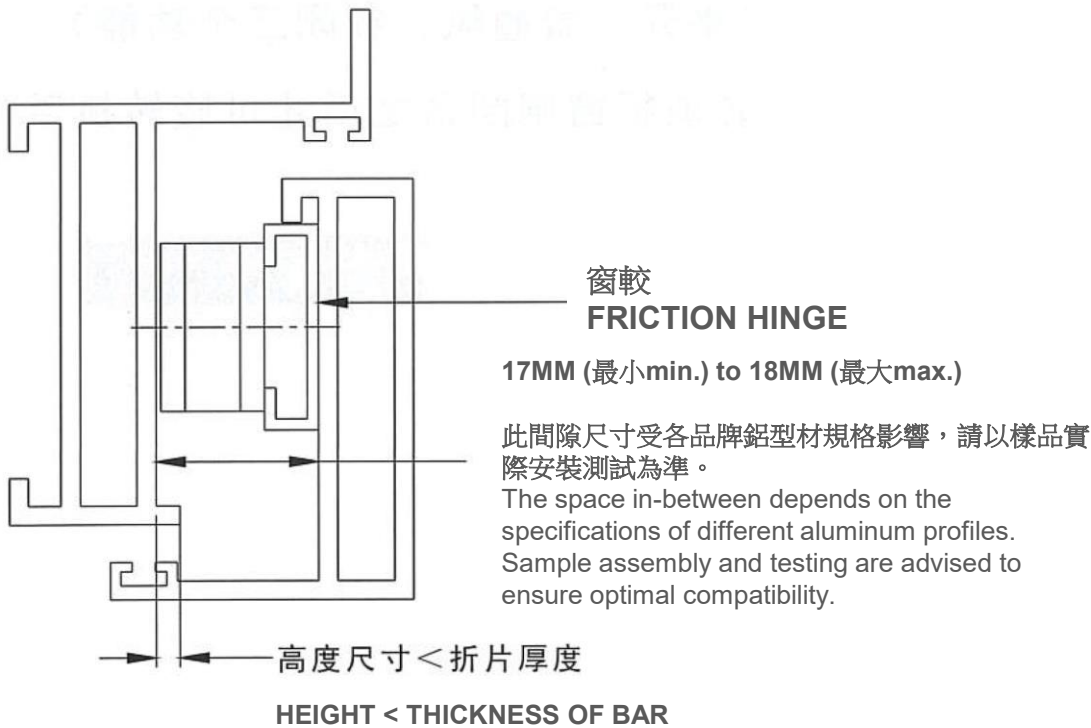

# 立興(楊氏)有限公司


## LIP HING (YEUNG'S) COMPANY LIMITED

### HHMT系列頂懸窗不銹鋼窗較 (左/右)


“HHMT” SERIES STAINLESS STEEL FRICTION HINGE FOR TOP HUNG WINDOW (LH/RH)

#### 不銹鋼窗較安裝要點


#### TIPS FOR INSTALLING STAINLESS STEEL FRICTION HINGE

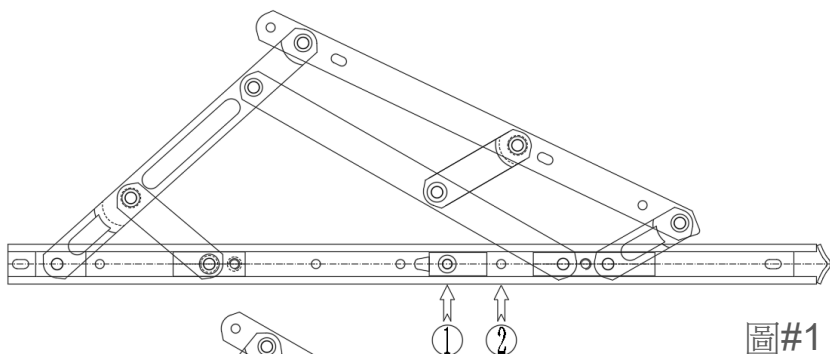

圖#1

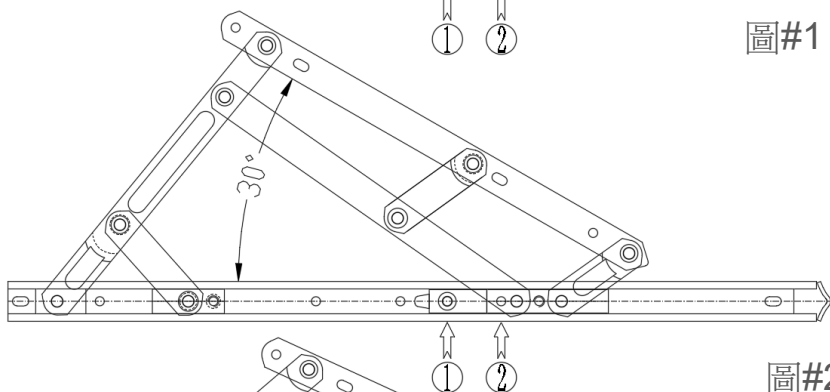

圖#2

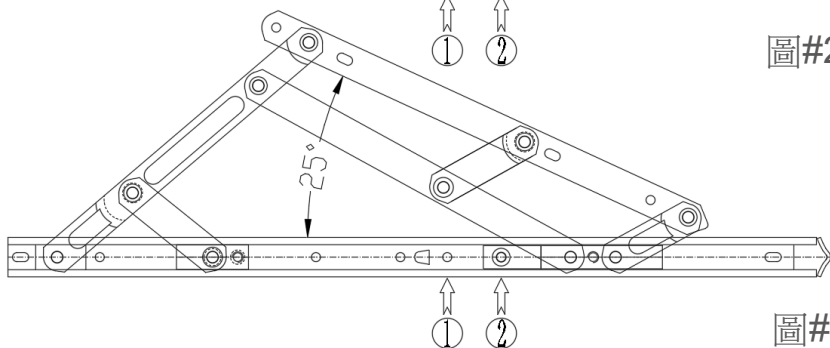

圖#3

#### 圖#1

HHMT系列一般有2-3個開啟角度，底槽就會有2-3對應的螺絲孔

#### 圖#2

HHMT系列如果開啟最大角度，底槽上定位塊對應的螺絲孔(1)要收螺絲  
底槽上滑塊要經過的螺絲孔(2)不能收螺絲

#### 圖#3

HHMT系列如果開啟最小角度，底槽上定位塊對應螺絲孔(2)要收螺絲  
底槽上定位塊後面的螺絲孔(1)要收螺絲

立興(楊氏)有限公司


LIP HING (YEUNG'S) COMPANY LIMITED

HHMT系列頂懸窗不銹鋼窗較 (左/右)


“HHMT” SERIES STAINLESS STEEL FRICTION HINGE FOR TOP HUNG WINDOW (LH/RH)

不銹鋼窗較安裝要點


TIPS FOR INSTALLING STAINLESS STEEL FRICTION HINGE

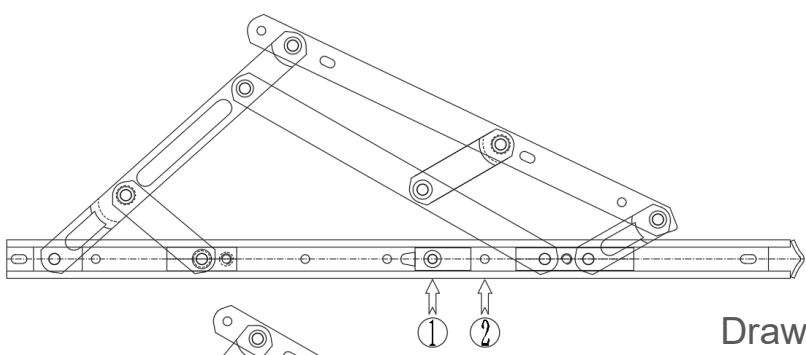

Drawing#  
1

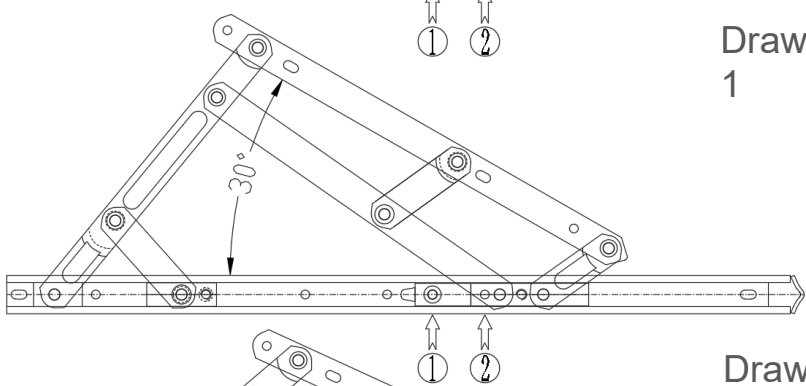

Drawing #2

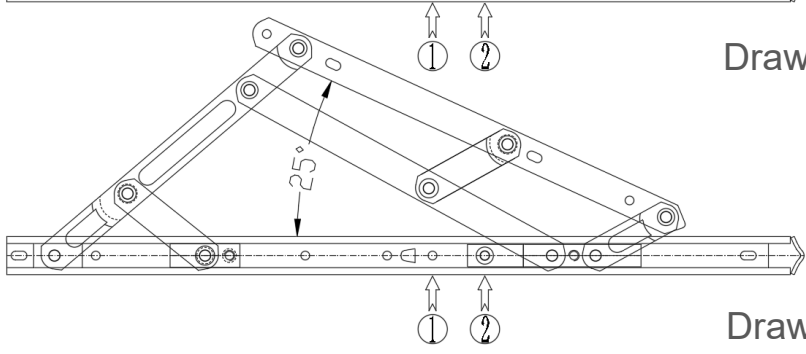

Drawing #3

**Drawing #1**

“HHMT” series usually has 2 – 3 choices of opening. The base rail then has corresponding screw holes.

**Drawing #2**

If HHMT hinges are to be opened to its largest angle, screw has to be mounted into corresponding hole (1) using the base rail stopper. Since the sliding bar will pass over hole (1), hole (2) should be mounted with screw.

**Drawing #3**

If HHMT hinges are to be opened at its smallest angle, usually the first angle, screw has to be mounted into corresponding hole (2) using the base rail stopper. Meanwhile, screw hole (1) has also be mounted with proper screw.


立興(楊氏)有限公司

LIP HING (YEUNG'S) COMPANY LIMITED


HHMT系列頂懸窗不銹鋼窗較 (左/右)

“HHMT” SERIES STAINLESS STEEL FRICTION HINGE FOR TOP HUNG WINDOW (LH/RH)


不銹鋼窗較安裝指引  
INSTALLATION GUIDE

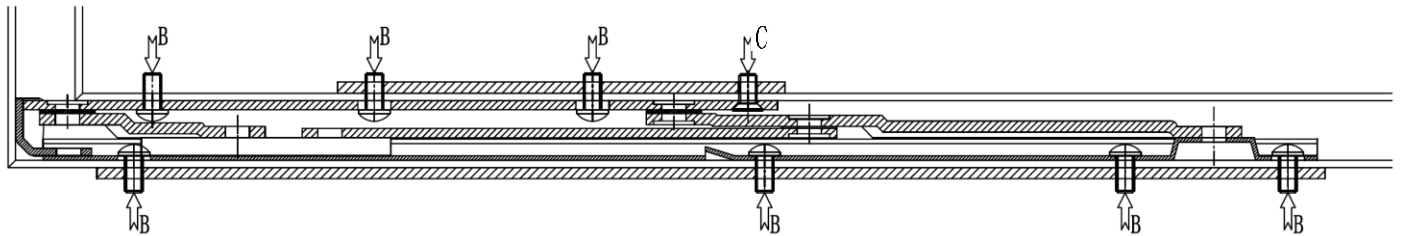

螺絲尺寸  
Screw sizes

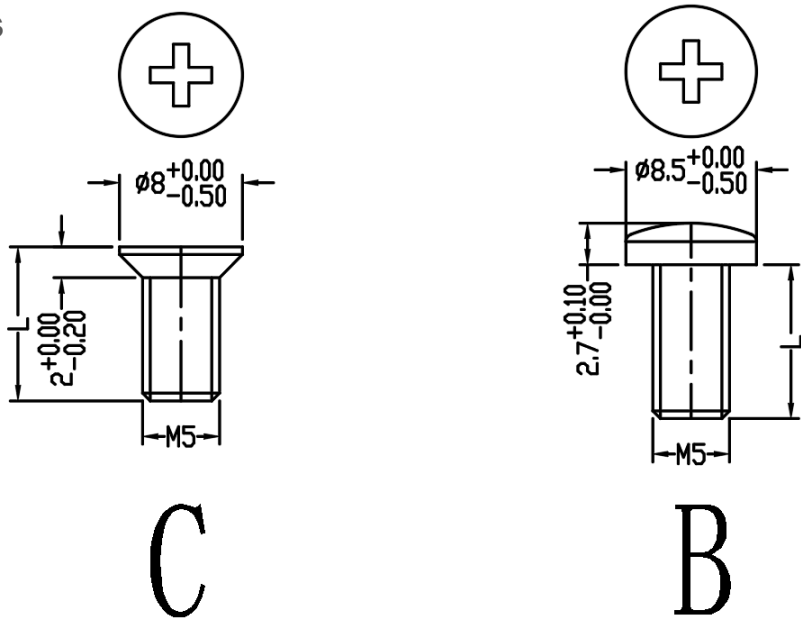

尺寸單位 Measurement unit: MM

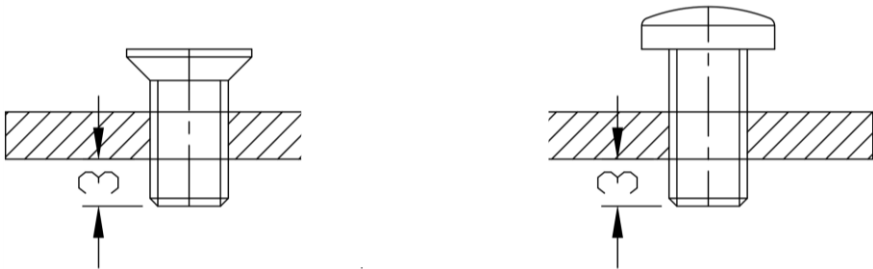

所有螺絲收緊後凸出最少有約2mm – 3mm如上圖  
After all screws are installed, screws must protrude at least 2mm – 3mm as shown above.